Smarter Myocardial Protection™



5303012



DESCRIPTION

MPS 3 Puritan-Bennett Medical Air Adapter Kit. Use this kit to connect Puritan-Bennett Medical Wall Outlets to the MPS 3 Medical Air Hoses.

INDICATION FOR USE

MPS 3 Puritan-Bennett Medical Air Adapter Kit is indicated to use as the interface between the MPS 3 Medical Air Hose and the hospital's installed medical air system.

CONTRAINDICATION


This product is designed and warranted for use with the Quest MPS 3 cardioplegia delivery system only. Use with other systems is contraindicated. This product is not designed, sold, or intended for use except as indicated.

WARNINGS and CAUTIONS

- 1. Read instructions carefully. The attending clinician is solely responsible for the setup and use of this device.
- 2. Federal (U.S.A) Law restricts this device to sale or on the order of a physician.
- 3. Do not kink tubing.
- 4. Before connecting Medical Air Supply to the MPS 3 System, please ensure the maximum pressure does not exceed 55psi. While the MPS 3 System will regulate the pressure down to the necessary operating levels, connecting high pressure may damage internal components.
- 5. Avoid OPERATOR INJURY. Only qualified technicians should attempt to connect a Medical Air Supply to the MPS 3 System. Make sure that all fingers are free from pinch/crush hazards while connecting the Medical Air Supply and tubing connectors.
- 6. Please ensure that the Medical Air Supply is free from oil, water, and residue to prevent unintended damage to the MPS 3 System.

INSTRUCTIONS FOR USE

- 1. Plug the brass and black quick connect of the Medical Air Hose into the back of the MPS 3 Console by pushing it into the mating quick connect (See Figure 1 and 2).
 - a. If needed, refer to the Medial Air Hose IFU and MPS 3/ND User Manual.
- 2. Plug the yellow end of the Medical Air Hose into the Puritan-Bennett Adapter (See Figure 2 and 3).
- 3. Plug the Puritan-Bennett Adapter into Puritan-Bennett Wye Block.
- 4. Plug the Puritan-Bennett Wye block into the medical air wall outlet (See Figure 4)
- 5. To disconnect Puritan-Bennett connections press the release button on the Puritan-Bennett Wye Block. Once locking mechanism is disengaged pull backwards on the male Puritan-Bennett Male plug to disconnect (See Figure 4).

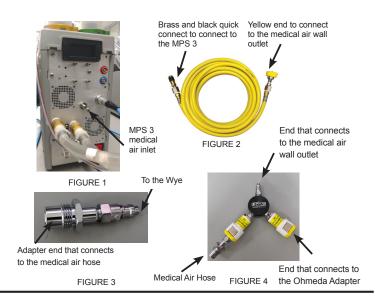

For symbols glossary visit www.guestmedical.com/resources.aspx











One Allentown Parkway, Allen, Texas 75002 USA +1.972.390.9800 | +1.800.627.0226 | F +1.972.390.8465